

RB21 , Directional Arrow, Straight , 32 x 12 (800 x 300 mm)

MATERIALS

Extruded 6105-T5 Aluminum 1.5" Sq.
Reinforced ¼" Aluminum Plate Corners
Face Material - ¼" Impact resistant clear pebble texture polycarbonate
- Optional Clear or Dark Black tinted polycarbonate.
Back Material - ¼" High density black polyethylene (HDPE).
Stainless Steel Fasteners.

ELECTRICAL

12 VDC @ 1 Amps, approx. 12 Watts.
Rear mounted NEMA4X Terminal Box
Included Meanwell LPV-20-12vdc UL power supply included
(for remote mounting).

LED's


WHITE 5mm Cree Hi-brightness LED. 15 deg.
Filled Arrows, CCT : 6000-7000K
Message blanks out when turned off.

FINISH

Standard Black Powdercoat or Natural Aluminum Clear Coat.
Custom colors available on request.

PHYSICAL

Standard sign
Viewable 32w x 12h (Actual 35.5w x 15.5h x 1.75d)
Rear T-Slot Spacing (Center to Center 34"w x 14"h)
Mounting - (4) movable S.S. 5/16-18 T-Slot Nuts in top(2) and bottom(2) slots
Approx. Sign Weight - 20 lbs.

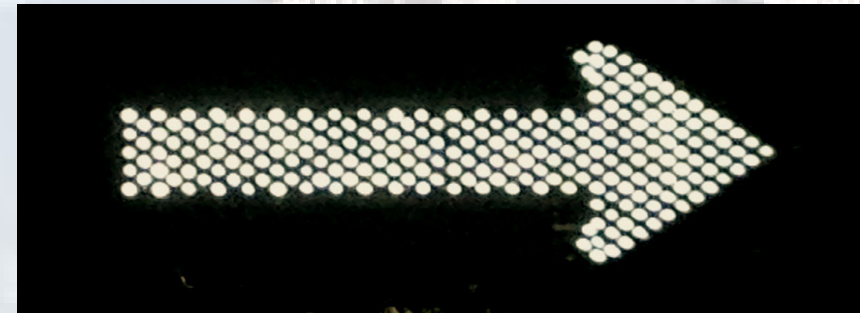

©M-Systems Inc 2014-2016

Available from

NOVA TECH, LLC

184 Goose Lane, Tolland, CT 06084

860-871-4180