

R10-11 , “NO TURN ON RED” w/ Red Ball

MATERIALS

Extruded Aluminum 1.5” Sq.
Reinforced ¼” Aluminum Plate Corners
Face Material - ¼” Impact resistant clear pebble texture polycarbonate
- Optional Clear or Dark Black tinted polycarbonate.
Back Material - ¼” High density black polyethylene (HDPE).

ELECTRICAL

12 VDC @ 2.6 Amps, approx. 32 Watts. (Single row 5x7).
12 VDC @ 3.9 Amps, approx. 46 Watts. (single Row 7x11).
12 VDC @ 3.0 Amps, approx. 36 Watts. (Dual row)
Operating Temp. -40 to +90 deg.C (-40 to +194 deg.F).
Remote mounted 12 VDC @ 35 or 60 Watt UL power supply included.

LED’s


Can be ordered as single or dual row LED characters.
WHITE 5mm Hi-brightness **RED** 5mm Hi-brightness
6” High text “NO” 6” Red Ball
5” High text, “TURN ON RED”
Message blanks out when turned off.

FINISH


Standard Black Powdercoat or Natural Aluminum Clear Coat.
Custom colors available on request.

PHYSICAL

Standard sign Sealed. IP65 weather tight.
Viewable 24w x 30h x 1.75d (Actual 27.5w x 33.5h x 1.75d)
Rear T-Slot Spacing (Center to Center 26”w x 32”h)
Extra wide sign. IP65 weather tight.
Viewable 30w x 36h x 1.75d (Actual 33.5w x 39.5h x 1.75d)
Mounting - (4) movable S.S. 5/16-18 T-Slot Nuts in top(2) and bottom(2) slots
Ship Weight - 34lbs (24x30), 42 lbs (30x36)

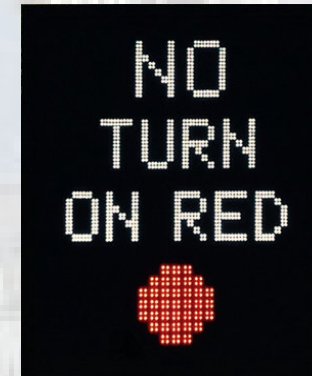

30 x 36 Black Lens



24 x 30 Clear Lens



24 x 30 Black Lens

©2008-2016

Available from

NOVA TECH, LLC

184 Goose Lane, Tolland, CT 06084

860-871-4180